



## IONPURE® LX-HI INSTANT HOT WATER SANITIZABLE CONTINUOUS ELECTRODEIONIZATION (CEDI) MODULES


### IONPURE LX-HI MODULE

Hot water sanitization has been shown to be more effective than chemical sanitization for controlling microbial growth. Ease of operation, maximum reliability and low operating costs are signature features of Ionpure® modules. LX-HI modules are ideal for pharmaceutical, biotechnology and other applications where chemical-free, instant hot water sanitization is desired. LX-HI modules produce high-purity water without regeneration downtime.

### LX-HI Series Features

- Hot water sanitizable at 185°F/85°C ± 5°C
- Continuous operation up to 140°F (60°C)
- US Patented technology for instant hot water capability - no ramp up/down required
- Higher sanitization pressures 30 psi/2.0 bar
- Double O-ring seal guarantees leak-free operation
- Proven performance after 150+ sanitizations
- Concentrate recirculation and brine injection not required
- Wetted materials of construction comply with FDA requirements

For additional information on our hot water sanitizable series of modules call 1 866.876.3340 or visit our website at [www.ionpure.com](http://www.ionpure.com).

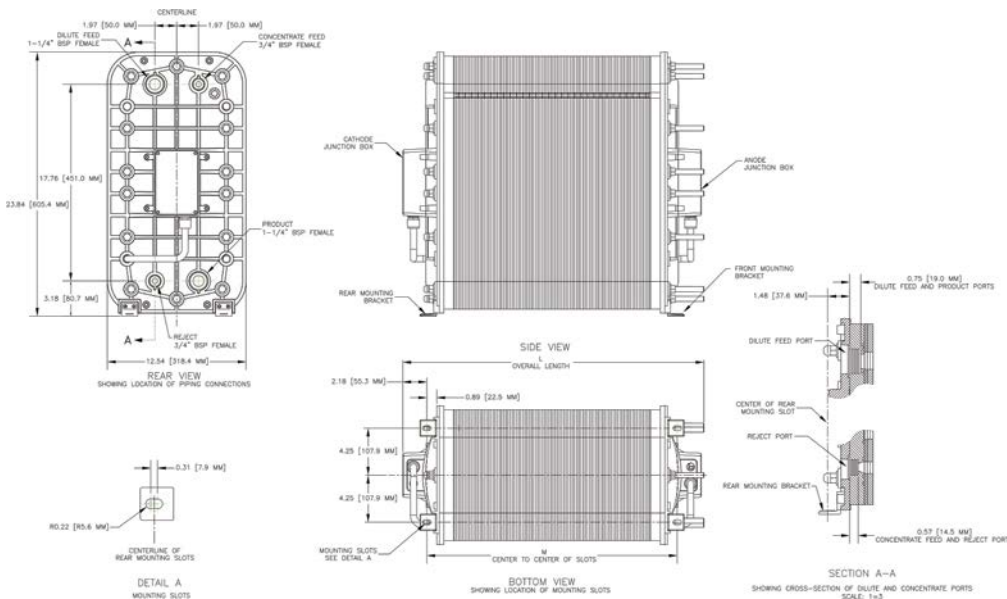

## OPERATING ENVIRONMENT

Installation should be indoors with no direct sunlight and should have a maximum ambient room temperature of 113°F (45°C).

## QUALITY ASSURANCE STANDARDS

CE marked. Each module is factory tested to meet strict industry standards and is manufactured in an ISO 9001 and ISO 14000 quality and environmental management system.

## Feed Water Specifications

Feed Water Conductivity Equivalent, including CO <sub>2</sub> and Silica	< 40 µS/cm
Temperature	40 - 140° F (5 - 60° C)
Inlet Pressure	20 - 100 psi (1.4 - 7 bar)
Maximum Free Chlorine (as Cl)	< 0.02 ppm
Iron (as Fe)	< 0.01 ppm
Manganese (as Mn)	< 0.01 ppm
Sulfide (S <sup>-</sup> )	< 0.01 ppm
pH	4 - 11
Total Hardness (as CaCO <sub>3</sub> )	< 1.0 ppm
Dissolved Organics (TOC as C)	< 0.5 ppm
Silica (SiO <sub>2</sub> )	< 1.0 ppm

## Typical Module Performance

### Operating Parameters

Typical Recovery	90 - 95%
Maximum Feed Pressure	100 psi (7 bar)
DC Voltage*	0 - 600
DC Amperage	0 - 10
Pressure Drop Range at Nominal Flow	20 - 30 psi (1.4 - 2.1 bar)
Maximum Feed Temperature	113°F (45°C)
Sanitization Temperature at 30 psi (2.0 bar)	185°F (85°C)

### Typical Product Water Quality

Product Conductivity	< 0.1 µS/cm
Silica (SiO <sub>2</sub> ) Removal	90 - 99%, depending on feed water

Note: Actual performance may be determined using the IP-Pro projection software available from Ionpure.  
\* Voltage required depends on module size

## Physical Specifications

Item Number	Dimensions	
	L ± .25" (6.4 mm)	M ± .13" (3.2 mm)
IP-LXM04HI-3	11.81" (300.0 mm)	7.47" (189.7 mm)
IP-LXM10HI-3	15.29" (388.6 mm)	10.96" (278.5 mm)
IP-LXM18HI-3	19.91" (505.7 mm)	15.62" (396.7 mm)
IP-LXM24HI-3	23.38" (593.9 mm)	19.12" (485.6 mm)
IP-LXM30HI-3	27.42" (696.5 mm)	22.61" (574.2 mm)
IP-LXM45HI-3	35.72" (907.3 mm)	31.35" (796.3 mm)

## ORDERING DETAILS

### LX-HI Series Modules

Item Number	Product Flow min. gpm (m <sup>3</sup> /hr)	Product Flow nominal gpm (m <sup>3</sup> /hr)	Product Flow max. gpm (m <sup>3</sup> /hr)	Shipping Weight lbs (kg)	Operating Weight lbs (kg)
IP-LXM04HI-3	1.0 (0.22)	2.0 (0.44)	3.0 (0.67)	150 (68)	110 (50)
IP-LXM10HI-3	2.5 (0.55)	5.0 (1.1)	7.5 (1.65)	200 (91)	150 (68)
IP-LXM18HI-3	4.5 (1.1)	9.0 (2.0)	13.5 (3.1)	220 (100)	170 (77)
IP-LXM24HI-3	6.3 (1.4)	12.5 (2.8)	18.8 (4.2)	250 (113)	200 (91)
IP-LXM30HI-3	7.5 (1.65)	15.0 (3.3)	22.5 (5.11)	270 (123)	220 (100)
IP-LXM45HI-3	11.3 (2.55)	22.5 (5.1)	33.8 (7.67)	320 (145)	270 (122.5)



4800 North Point Parkway, Suite 250, Alpharetta, GA 30022

+1 (866) 926-8420 (toll-free)

+1 (978) 614-7111 (toll)

[www.ionpure.com](http://www.ionpure.com)

Ionpure is a trademark of Evoqua, its subsidiaries or affiliates, in some countries.

All information presented herein is believed reliable and in accordance with accepted engineering practices. Evoqua makes no warranties as to the completeness of this information. Users are responsible for evaluating individual product suitability for specific applications. Evoqua assumes no liability whatsoever for any special, indirect or consequential damages arising from the sale, resale or misuse of its products.

© 2014 Evoqua Water Technologies LLC Subject to change without notice ION-LXHI-DS-0714